1456722-1 ✔ ACTIVE

1.5/2.8 Connector System

TE Internal #: 1456722-1

Cover - Cable Exit, Black, PBT GF, -40 – 120 °C [-40 – 248 °F], 1.5/2.

8 Connector System, Automotive Connector Caps & Covers

View on TE.com >

Connectors > Automotive Connectors > Automotive Connector Accessories > Automotive Connector Caps & Covers







Protection & Strain Relief Accessory Type: **Cover - Cable Exit**

Strain Relief: **With**

Primary Product Color: **Black**

Primary Product Material: **PBT GF**

Operating Temperature (Max): **80 °C, 105 °C, 90 °C, 100 °C, 85 °C, 75 °C, 70 °C, 110 °C, 120 °C [248 °F, 221 °F, 167 °F, 158 °F, 230 °F, 176 °F, 194 °F, 185 °F, 212 °F]**

Features

Product Type Features

Protection & Strain Relief Accessory Type	Cover - Cable Exit

Mechanical Attachment

Strain Relief	With

Body Features

Primary Product Color	Black
Primary Product Material	PBT GF

Usage Conditions

Operating Temperature (Max)	80 °C, 105 °C, 90 °C, 100 °C, 85 °C, 75 °C, 70 °C, 110 °C, 120 °C[248 °F][221 °F][167 °F][158 °F][230 °F][176 °F][194 °F][185 °F][212 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]

Other

EU RoHS Compliance	Compliant

EU ELV Compliance	Compliant
Serviceable	Yes

Dimensions

Compatible Cable Bundle Diameter Range	18 mm[.709 in]

Industry Standards

UL Flammability Rating	UL 94HB

Packaging Features

Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 1587042-1
34P MALE CAP ASSY-KEY A


Also in the Series | 1.5/2.8 Connector System

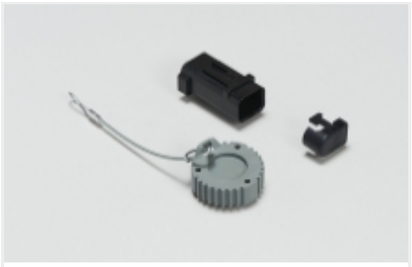

Automotive Connector Caps & Covers (3)




Automotive Housings(27)

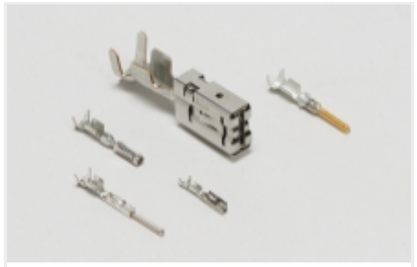


Automotive Terminals(48)



Insertion & Extraction Tools(1)

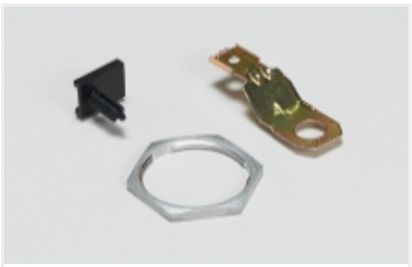

Other Automotive Connector Accessories(1)

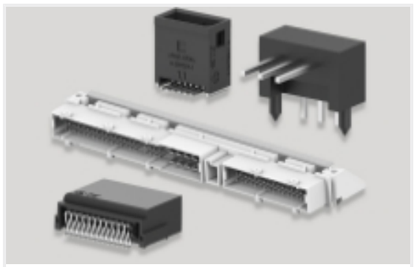

PCB Headers & Receptacles(1)

Customers Also Bought




TE Part #7251716003
TSAS-NR504-X-15MM



TE Part #A27820-000
FL2500 Heat Shrink Tubing




TE Part #C57775-000
SCL-1-0-55MM

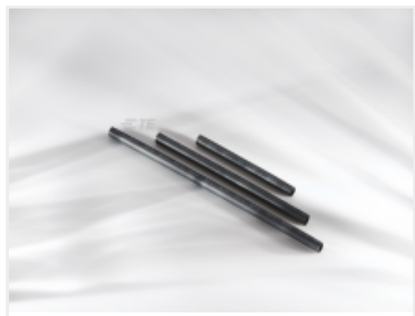

TE Part #537637P042
SCT-NO.3-E3-0-35MM



TE Part #2098627-1
22P UNSEALED HYBRID PLUG ASSEM

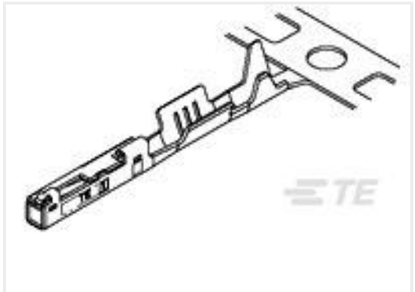

TE Part #1827855-4
0.50 SERIES CONNECTER RECEPTACLE CONTACT



TE Part #CZ7809-000
ES2000-NO.0-O9-0-50MM



TE Part #121397P067
ES2000-NO.3-B8-0-25MM

TE Part #5-21028-1
PIN,SLOTTED SPRING

Documents

Product Drawings

Wire Guide, 34 Way, Right Out

English

CAD Files

Customer View Model

ENG_CVM_CVM_1456722-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1456722-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1456722-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.