

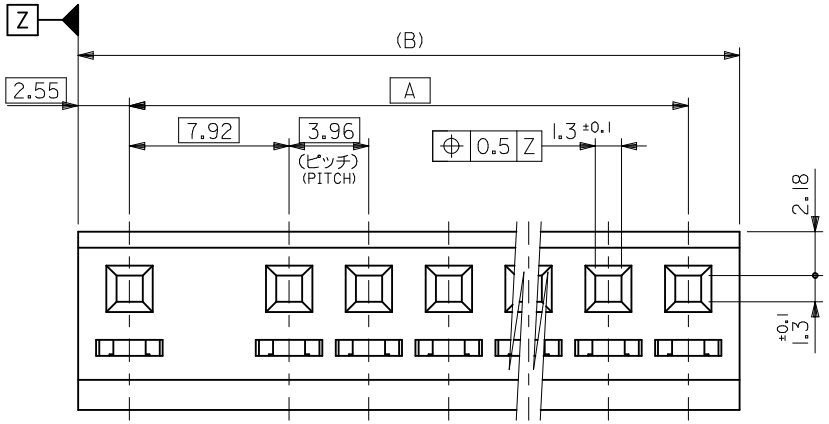


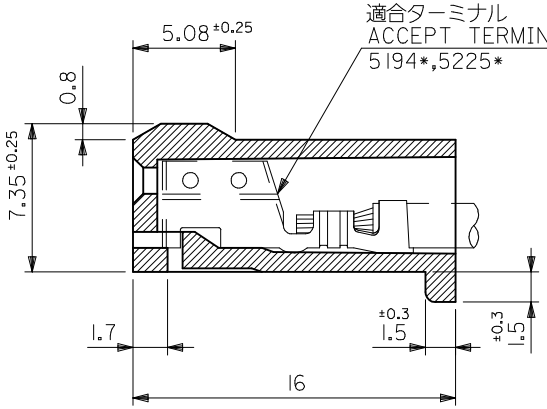

注記
NOTES

1. 各部の反りは0.5最大。
   WARPING : 0.5 MAX.
2. サーキットNO.は NO."1"のみ表示。
   CIRCUIT NO. : 1 ONLY.
3. ELV及びRoHS適合品.
   ELV AND RoHS COMPLIANT.

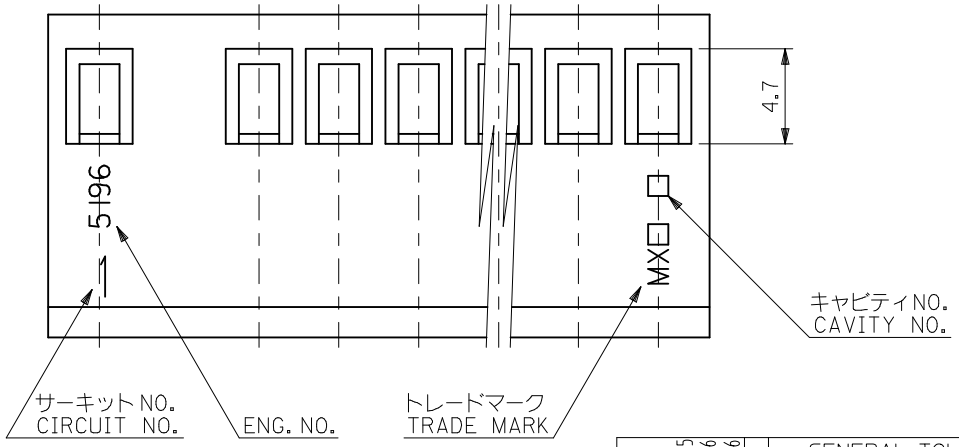

52.62	47.52	09-50-1123	5196-12	12
48.66	43.56	-1113	-11	11
44.7	39.6	-1103	-10	10
40.74	35.64	-1093	-09	9
36.78	31.68	-1083	-08	8
32.82	27.72	-1073	-07	7
28.86	23.76	-1063	-06	6
24.9	19.8	-1053	-05	5
20.94	15.84	-1043	-04	4
16.98	11.88	-1033	-03	3
13.02	7.92	09-50-1023	5196-02	2
B	A	EDP. NO.	ENG. NO.	極数 NO. OF CKTS.

材料 MATERIAL: ナイロン66、UL94V-2 色:オフホワイト
NYLON66, UL94V-2 COLOR : OFFWHITE

REVISED
EC NO: J2009-2074 2009/04/15
DRWN:CARIZONO 2009/04/16
CH'KD:T.HARUYAMA 2009/04/16
APPR:NUKITA 2009/04/16
DESCRIPTION
REV
K

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 4:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: M.FUJIKURA DATE: 1992/09/07
CHECKED BY: H.HIRAMOTO DATE: 1992/09/08
APPROVED BY: M.FUKUSHIMA DATE: 1992/09/08

TITLE: SPOX 7.92/3.96 REC HSG

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-5196-001
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION