

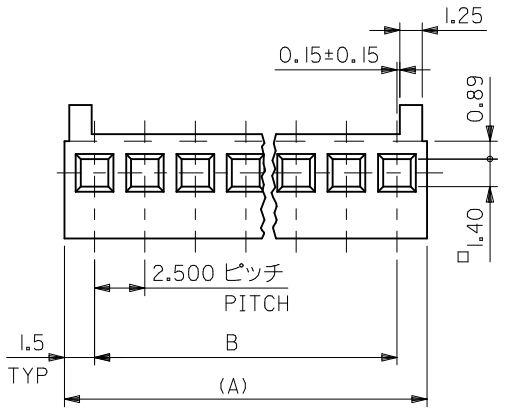


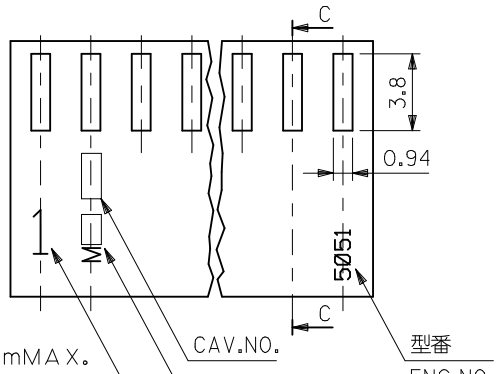

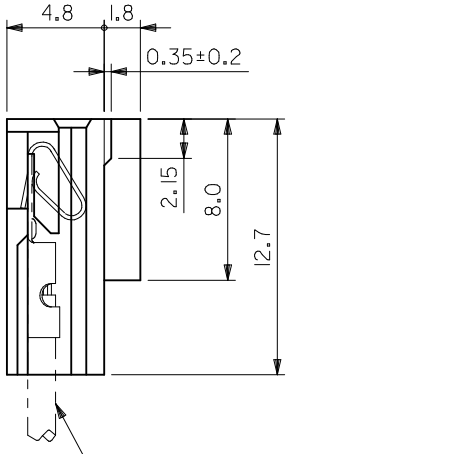

注)
NOTE.

1. そりは長さ25。4mmに対して0。2mmMAX。
   CAMBER MUST BE WITHIN 0.2 MAX. PER 25.4.
2. (　) 寸法は参考値
   DIMENSION SHOWN IN ( ) ARE REFERENCE.
3. サーキットNO。1のみ表示　但し2極の場合は
   トレードマーク側が1となる
   WHEN 2 CIRCUITS HOUSING TRADE MARK SIDE IN NO.1 CIRCUIT.

MT'L. NYLON 66(94V-0)

5051-16	22-01-1162	16	37.50±0.25	40.50
-15	-1152	15	35.00±0.20	38.00
-14	-1142	14	32.50±0.20	35.50
-13	-1132	13	30.00±0.20	33.00
-12	-1122	12	27.50±0.20	30.50
-11	-1112	11	25.00±0.15	28.00
-10	-1102	10	22.50±0.15	25.50
-09	-1092	9	20.00±0.15	23.00
-08	-1082	8	17.50±0.15	20.50
-07	-1072	7	15.00±0.15	18.00
-06	-1062	6	12.50±0.10	15.50
-05	-1052	5	10.00±0.10	13.00
-04	-1042	4	7.50±0.10	10.50
-03	-1032	3	5.00±0.10	8.00
5051-02	22-01-1022	2	2.50±0.08	5.50
MATERIAL NO.	PART NO.	極数 N	B	(A)

MODEL NO. 5051-N

REVISED
EC NO: J2016-1107 2016/04/20
DRWN:SSATO02 2016/04/20
CH'KD:KASAKAWA
APPR:TKANEKO 2016/06/20
DESCRIPTION
REV
M

GENERAL TOLERANCES (UNLESS SPECIFIED)

0.25	UNDER	UNDER	±0.03
0.25	OVER 0.5	UNDER	±0.05
0.5	OVER 1.0	UNDER	±0.1
1.0	OVER 10	UNDER	±0.25
10	OVER 30	UNDER	±0.3
30	OVER		±0.35
ANGULAR	±3 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 4:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: K.KOHAMA DATE: '00/3/28
CHECKED BY: T.YAMAGUCHI DATE: '00/3/30
APPROVED BY: M.FUKUSHIMA DATE: '00/3/30

TITLE: 2.50/(.098) CENTERS KK POLZG HSG

molex

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-5051-001
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION