350428-1 ✔ ACTIVE

MATE-N-LOK | Universal MATE-N-LOK

TE Internal #: 350428-1


PCB Mount Header, Vertical, Wire-to-Board, 2 Position, 6.35 mm [.25 in] Centerline, Fully Shrouded, Pre-Tin, Universal MATE-N-LOK

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles





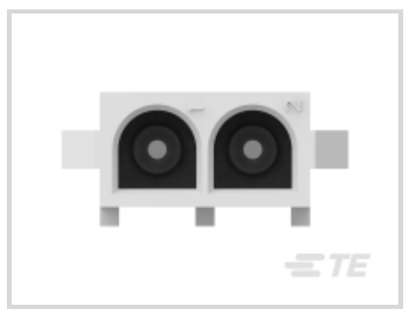

EU RoHS Compliance: **Compliant**

EU ELV Compliance: **Compliant**

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Features

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Columns	2
Number of Loaded Positions	2
Number of Power Positions	2

Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC

Body Features

Primary Product Color	Natural

Contact Features

Contact Underplating Material	Nickel
Mating Pin Diameter	2.2 mm[.087 in]
Contact Underplating Material Thickness	1.27 – 1.79 µm[50 – 70 µin]
Contact Size	2.2mm
Contact Mating Area Plating Material Thickness	3.81 – 5.08 µm[150 – 200 µin]
Contact Shape & Form	Round
PCB Contact Termination Area Plating Material Thickness	3.81 – 5.08 µm[150 – 200 µin]
Contact Layout	Inline
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Pre-Tin
Contact Mating Area Plating Material	Pre-Tin
Contact Type	Pin
Contact Current Rating (Max)	12 A

Termination Features

Termination Post & Tail Diameter	1.57 mm[.062 in]
Termination Post & Tail Length	3.56 mm[.14 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Locking Tab
Mating Retention	With
Mating Alignment Type	Polarization
PCB Mount Retention	Without

PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Mating Entry Location	Top
Housing Material	Nylon
Centerline (Pitch)	6.35 mm[.25 in]

Dimensions

Connector Width	7.62 mm[.3 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Connector Height	13.97 mm[.55 in]
Connector Length	13.97 mm[.55 in]
Profile Height from PCB	14.73 mm[.58 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]

Operation/Application

Circuit Application	Power

Industry Standards

Compatible With Agency/Standards Products	UL, VDE, CSA
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-2

Packaging Features

Packaging Quantity	200
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 640713-1
02P UMNL STR/REL & INSERT



TE Part # 1-350589-0
STR/REL CLAMP NATL




TE Part # 350811-1
STR/REL CLAMP




TE Part # 640713-2
02P UMNL STR/RELIEVE



TE Part # 770351-1
04P UMNL PIN HDR ASSY W/O DRNS

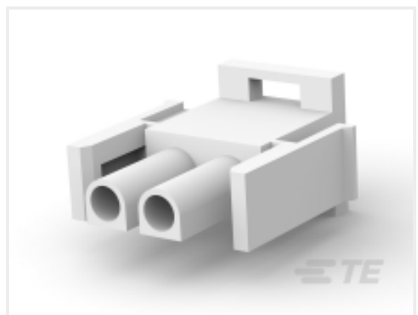

TE Part # 1-480698-0
02P UMNL PLUG HSG NATL

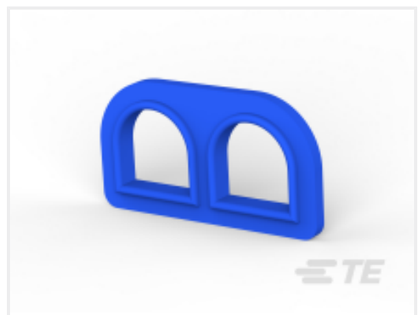

TE Part # 794269-1
02P UMNL INTERFACE SEAL



TE Part # 2029000-1
02P UMNL HDR SHRT TAIL, NDH



TE Part # 794815-1
02P UMNL CAP HSG,HI TEMP



TE Part # 1703062-1
CAP, 2 CIRCUIT , UNIVERSAL MATE-N-LOK



TE Part # 794991-1
02P UMNL BLACK INTERFACE SEAL



TE Part # 1586856-1
02P UMNL CAP HSG, GW



TE Part # 350848-2
02P UMNL PLUG TEST ASSY 94VO



TE Part # 1-640719-1
02P UMNL STR/REL NATL



TE Part # 794270-1
02P UMNL WIRE SEAL




TE Part # 1-640719-0
02P UMNL STR/REL & INSRT NATL



TE Part # 643250-1
02P UMNL ASSY MOD HSG V0



TE Part # 1703062-2
CAP, 2 CIRCUIT , UNIVERSAL MATE-N-LOK

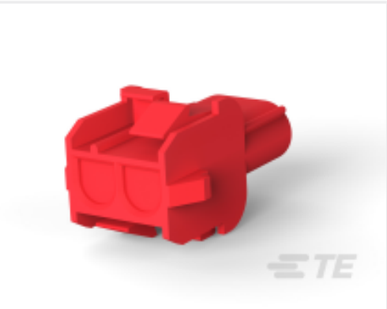


TE Part # 1703062-3
CAP, 2 CIRCUIT , UNIVERSAL MATE-N-LOK



TE Part # 2-480699-0
02P UMNL CAP HSG NATL

Also in the Series | Universal MATE-N-LOK

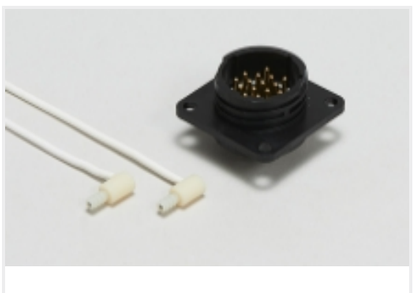

Circular Power Connectors(2)



Connector Caps & Covers(34)



Connector Contacts(209)



Connector Hardware(12)




Connector Seals & Cavity Plugs(27)




Connector Strain Relief(7)



Insertion & Extraction Tools(4)

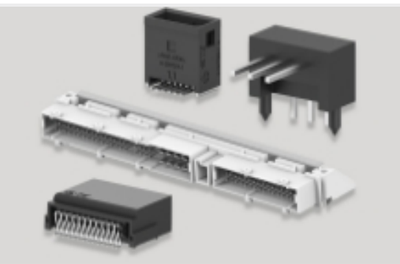

PCB Headers & Receptacles(284)

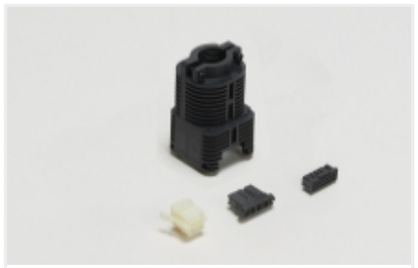

Rectangular Connector Housings(1)




Rectangular Power Connectors(370)



Standard Circular Connectors(1)

Customers Also Bought

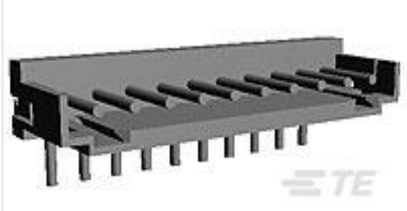

TE Part #1-292253-1
CT CONN MT HDR ASSY H 11P NAT



TE Part #5749265-1
Mini DIN, 6 pos, R/A, Shield



TE Part #350792-1
04P UMML PIN HDR ASSY 94VO




TE Part #640466-1
05P UMNL PIN HDR ASSY V2 NATL



TE Part #350759-4
02P UMNL HDR ASSY PC V2 NATL



TE Part #5-104477-7
100 SYSTEM 50 HDR DRRA SHRD SN



TE Part #180940-5
FF 250 TAB HSG 3P NYLON BLACK



TE Part #5-826664-0
50P MODU 2 PIN HDR.



TE Part #368297-1
RETAINER HSG FOR MQS 76P

Documents

Product Drawings

02P UMNL PIN HDR ASSY NATL

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_350428-1_Y.2d_dxf.zip

English

Customer View Model

ENG_CVM_350428-1_Y.3d_igs.zip

English

Customer View Model

ENG_CVM_350428-1_Y.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_350428-1_AH.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_350428-1_AH.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_350428-1_AH.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL

English